


Angular Contact Ball Bearing (ZrO2)

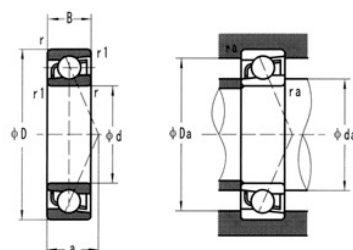

Rilevamento n.	Differenze(mm)					Montaggio delle Dimensioni(mm)			Peso di riferimento (kg)
	d	D	B	r(min)	r1(min)	Da Min	da max	ra max	
7900	10	22	6	0.3	0.15	12.5	19.5	0.3	0.007
7000	10	26	8	0.3	0.15	12.5	23.5	0.3	0.014
7200	10	30	9	0.6	0.3	15	25	0.6	0.025
7300	10	35	11	0.6	0.3	15	30	0.6	0.04
7901	12	24	6	0.3	0.15	14.5	21.5	0.3	0.008
7001	12	28	8	0.3	0.15	14.5	25.5	0.3	0.017
7201	12	32	10	0.6	0.3	17	27	0.6	0.028
7301	12	37	12	1	0.6	18	31	1	0.046
7902	15	28	7	0.3	0.15	17.5	25.5	0.3	0.012
7002	15	32	9	0.3	0.15	17.5	29.5	0.3	0.024
7202	15	35	11	0.6	0.3	20	30	0.3	0.035
7302	15	42	13	1	0.6	21	36	1	0.064
7903	17	30	7	0.3	0.15	19.5	27.5	0.3	0.013
7003	17	35	10	0.3	0.15	19.5	32.5	0.3	0.032
7203	17	40	12	0.6	0.3	22	35	0.6	0.052
7303	17	47	14	1	0.6	23	41	1	0.087
7904	20	37	9	0.3	0.15	22.5	34.5	0.3	0.028
7004	20	42	12	0.6	0.3	25	37	0.6	0.052
7204	20	47	14	1	0.6	26	41	1	0.082

Angular Contact Ball Bearing (ZrO₂)

7304	20	52	15	1.1	0.6	27	45	1	0.11
7905	25	42	9	0.3	0.15	27.5	39.5	0.3	0.032
7005	25	47	12	0.6	0.3	30	42	0.6	0.061
7205	25	52	15	1	0.6	31	46	1	0.099
7305	25	62	17	1.1	0.6	32	55	1	0.18
7906	30	47	9	0.3	0.15	32.5	44.5	1	0.04
7006	30	55	13	1	0.6	36	49	1	0.089
7206	30	62	16	1	0.6	36	56	1	0.15
7306	30	72	19	1.1	0.6	37	65	1	0.27
7907	35	55	10	0.6	0.3	40	50	0.6	0.058
7007	35	62	14	1	0.6	41	56	1	0.12