


# Self-aligning Ball Bearing (ZrO2)

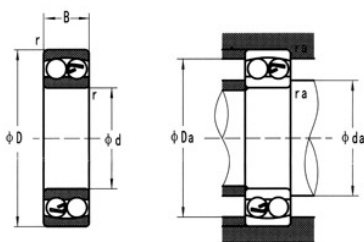

| Rilevamento n. | Differenze(mm) |    |    |        | Montaggio delle Dimensioni(mm) |        |        | Peso di riferimento (kg) |
|----------------|----------------|----|----|--------|--------------------------------|--------|--------|--------------------------|
|                | d              | D  | B  | r(min) | Da Min                         | da max | ra max |                          |
| 135            | 5              | 19 | 6  | 0.3    | 7                              | 17     | 0.3    | 0.007                    |
| 126            | 6              | 19 | 6  | 0.3    | 8                              | 17     | 0.3    | 0.007                    |
| 127            | 7              | 22 | 7  | 0.3    | 9                              | 20     | 0.3    | 0.011                    |
| 108            | 8              | 22 | 7  | 0.3    | 10                             | 20     | 0.3    | 0.011                    |
| 129            | 9              | 26 | 8  | 0.6    | 13                             | 22     | 0.6    | 0.017                    |
| 1200           | 10             | 30 | 9  | 0.6    | 14                             | 26     | 0.6    | 0.026                    |
| 2200           | 10             | 30 | 14 | 0.6    | 14                             | 26     | 0.6    | 0.036                    |
| 1300           | 10             | 25 | 11 | 0.6    | 14                             | 31     | 0.6    | 0.045                    |
| 2300           | 10             | 25 | 17 | 0.6    | 14                             | 31     | 0.6    | 0.065                    |
| 1201           | 12             | 32 | 10 | 0.6    | 16                             | 28     | 0.6    | 0.031                    |
| 2201           | 12             | 32 | 14 | 0.6    | 16                             | 28     | 0.6    | 0.041                    |
| 1301           | 12             | 37 | 12 | 1      | 17                             | 32     | 1      | 0.052                    |
| 2301           | 12             | 37 | 17 | 1      | 17                             | 32     | 1      | 0.073                    |
| 1202           | 15             | 35 | 11 | 0.6    | 19                             | 31     | 0.6    | 0.038                    |
| 2202           | 15             | 35 | 14 | 0.6    | 19                             | 31     | 0.6    | 0.046                    |
| 1302           | 15             | 42 | 13 | 1      | 20                             | 37     | 1      | 0.072                    |
| 2302           | 15             | 42 | 17 | 1      | 20                             | 37     | 1      | 0.088                    |
| 1203           | 17             | 40 | 12 | 0.6    | 21                             | 36     | 0.6    | 0.056                    |
| 2203           | 17             | 40 | 16 | 0.6    | 21                             | 36     | 0.6    | 0.068                    |
| 1303           | 17             | 47 | 14 | 1      | 22                             | 42     | 1      | 0.1                      |

# Self-aligning Ball Bearing (ZrO2)

|      |    |    |    |     |      |      |   |      |
|------|----|----|----|-----|------|------|---|------|
| 2303 | 17 | 47 | 19 | 1   | 22   | 42   | 1 | 0.12 |
| 1204 | 20 | 47 | 14 | 1   | 25   | 42   | 1 | 0.09 |
| 2204 | 20 | 47 | 18 | 1   | 25   | 42   | 1 | 0.11 |
| 1304 | 20 | 52 | 15 | 1.1 | 26.5 | 45.5 | 1 | 0.13 |
| 1304 | 20 | 52 | 21 | 1.1 | 26.5 | 45.5 | 1 | 0.16 |
| 1205 | 25 | 52 | 15 | 1   | 30   | 47   | 1 | 0.11 |
| 2205 | 25 | 52 | 18 | 1   | 30   | 47   | 1 | 0.13 |
| 1305 | 25 | 62 | 17 | 1.1 | 31.5 | 55.5 | 1 | 0.2  |
| 2305 | 25 | 62 | 24 | 1.1 | 31.5 | 55.5 | 1 | 0.26 |
| 1206 | 30 | 62 | 16 | 1   | 35   | 57   | 1 | 0.17 |